



**A safer substitute for STOP-SLOW hand held signs**

RMS Type Approval Number: ITS-TAN000125

#### POWER SPECIFICATIONS:

POWER SUPPLY  
ENERGY STORAGE  
BATTERY CHARGER

Nominal 12 Volts. Range 10.8 – 14.2V  
12V 20AH LiPo Battery  
240V AC Input – Output 12V 100W

#### ENDURANCE SPECIFICATION:

Up to 24 hours operation on a full charge

#### OPTICAL SPECIFICATIONS:

RED, YELLOW, GREEN ASPECTS  
200mm, with Automatic Dimming  
YELLOW REAR BEACON

#### CONTROL SPECIFICATIONS:

Data Signs PTL-Stop-n-Go & PTL  
Remote Operation as per AS 4191-2015 &  
MRTS264(QLD) TSI-SP-062,049 and 50

#### COMMUNICATION RANGE BETWEEN MASTER-SLAVE

900MHZ ISM SSFH Multiband, 8 channels selectable  
up to 800m line of sight

#### MECHANICAL SPECIFICATIONS:

WEIGHTS  
STAND  
BATTERY PACK  
LIGHTS  
TOTAL  
OPTIONAL TARGET BOARD

2.6 Kg  
4.4 Kg including Remote  
7.4 Kg  
17.0 Kg  
2.20 Kg

#### TRIPOD STAND HEIGHT (FULLY SETUP)

1480mm diameter footprint  
2270mm (not including Target Board)

#### WIND LOADING

20 m/s (72 Kph) with 20Kg ballasts placed  
on each leg

#### CARRY BAG FOR LIGHTS & STAND

920mm Long x 400mm High x 400mm Wide

#### TYPE 1 OPERATIONAL CONTROL VIA REMOTE ONLY

OPTIONS:  
TARGET BOARD  
BALLAST (SET OF 3) PER UNIT



Smart Terminal,  
Remote Control

#### OPERATIONAL MODES:

Gating (single unit use)
Shuttle (dual unit use)
Copy (for gating mode. <i>Not QLD</i> )
Plant Crossing ( <i>Not QLD</i> )




Shown with optional Ballast & Target Board.  
Target Boards Mandatory in NSW.

#### Optional Ballast (Mandatory for QLD)



#### Carry bag

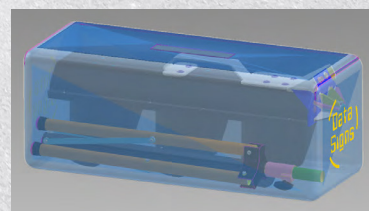

Designed for easy fold away  
and storage function



**Data Signs**  
AUSTRALIA  
Since 1976

[datasigns.com](https://datasigns.com)  
1300 850 785

