DATASIGN PORTABLE
BOOM GATE

Datasign Portable Boom Gate.



Options

Key Fob



Back inside view





Traffic Light

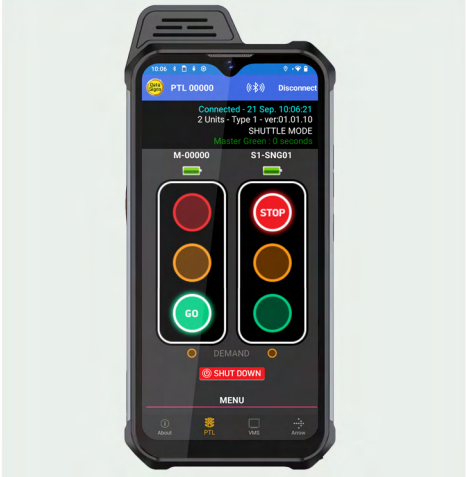

Remote Control

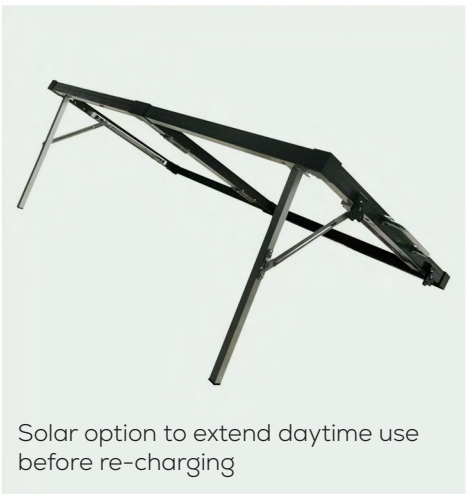

Solar option to extend daytime use before re-charging

Solar

www.datasigns.com 1300 850 785

© 2026. All rights reserved. Measurements stated in millimetres. Errors & omissions excepted. Specifications & features may change without notice. *Terms & conditions apply. BRO 0016I Issue 2.

DATA SIGN
PORTABLE BOOM GATE

SPECIFICATIONS

Unit Dimensions	
Height	1100mm (1180mm including Handle and Aerial)
Width	300mm (380mm with Light option fitted)
Depth	370mm Including Boom (440mm including Handle)
Depth Setup with stabiliser arm extended	800mm
Weight: Main Unit	35Kg (Basic unit – not including, Batteries, Ballast or options fitted)
Boom Gate	6.5Kg
Battery Weight	15Kg Each – Total 30Kg
Total System Weight including Ballasts & Optional Light & Target Board fitted	155Kg

Basic Model Inclusions
Boom – 2.5 meter length – expandable to 4 meters with RED/GREEN LED bar, STOP SIGN.
Vehicle Detector – to stop boom lowering if vehicle under boom.
2 x 40AH AGM Batteries (weight 15Kg each)
240V AC, 24V 10A Mains Battery Charger
2 x Key FOB Remotes

Options
4 x 20Kg Ballast – to provide greater stabilization.
PTL Trailer & PTL Compact interface – connects via direct link cable or RF.
PTL ST-1 Smart Remote Controller.
Traffic Light fitted to Boom Gate Option – Australian Standards Traffic Light.
Traffic Light Target Board.
PTL-Boom Gate Solar option. 200W 36V Foldable solar panel – sits on ground. NOTE: This is not a substitute for mains power connection for continuous operation. It only serves to extend the operation during day time use. If continuous use is required, depending on use and location, up to 4 x 200w solar panels may be needed.

© 2026. All rights reserved. Measurements stated in millimetres. Errors & omissions excepted. Specifications & features may change without notice. *Terms & conditions apply. BRO 0016I Issue 2.