



A safer substitute for STOP-SLOW hand held signs

RMS Type Approval Number: ITS-TAN000125

TMR Type approval Number: 24-15

POWER SPECIFICATIONS:

POWER SUPPLY
ENERGY STORAGE
BATTERY CHARGER

Nominal 12 Volts. Range 10.8 – 14.2V
12V 20AH LiPo Battery
240V AC Input – Output 12V 100W

ENDURANCE SPECIFICATION:

Up to 24 hours operation on a full charge

OPTICAL SPECIFICATIONS:

RED, YELLOW, GREEN ASPECTS
200mm, with Automatic Dimming
YELLOW REAR BEACON

CONTROL SPECIFICATIONS:

Data Signs PTL-Stop-n-Go & PTL Remote Operation as per AS 4191-2015 & MRTS264(QLD) TSI-SP-062,049 and 50

COMMUNICATION RANGE BETWEEN MASTER-SLAVE

900MHZ ISM SSFH Multiband, 8 channels selectable up to 800m line of sight

MECHANICAL SPECIFICATIONS:

WEIGHTS
STAND
BATTERY PACK
LIGHTS
TOTAL
OPTIONAL TARGET BOARD

TMR Type approval No: 24-15

2.6 Kg
4.4 Kg including Remote
7.4 Kg
17.0 Kg
2.20 Kg

TRIPOD STAND HEIGHT (FULLY SETUP)

1480mm diameter footprint
2270mm (not including Target Board)

WIND LOADING

20 m/s (72 Kph) with 20Kg ballasts placed on each leg

CARRY BAG FOR LIGHTS & STAND

920mm Long x 400mm High x 400mm Wide

TYPE 1 OPERATIONAL CONTROL VIA REMOTE ONLY

OPTIONS:

- BALLAST (SET OF 3) PER UNIT
- LONG-RANGE ANTENNA
- RANGE EXTENDER
- EXTRA BATTERY PACK

OPERATIONAL MODES:

Gating (single unit use)
Shuttle (dual unit use)
Copy (for gating mode. <i>Not QLD</i>)
Plant Crossing (<i>Not QLD</i>)



Smart Terminal Remote Control

OR



RF Remote Control



Shown with optional Ballast & Target Board. Target Boards Mandatory in NSW.


Optional Ballast (Mandatory for QLD)



Optional Extra Battery Pack



Carry bag

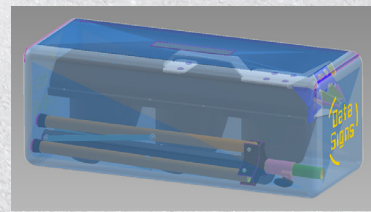

Designed for easy fold away and storage function



Data Signs
A U S T R A L I A

Since 1976

datasigns.com
1300 850 785





DATASIGN-PTL-STOP-N-GO

OPTIONS & ACCESSORIES

OPTIONS:

PTL RF REMOTE LONG RANGE PTL ST-1 BLUETOOTH REMOTE



LONG-RANGE ANTENNA



RANGE EXTENDER



BATTERY PACK



www.datasigns.com



1300 850 785