



After Sales Red Light Timer Installation.





Red Light Timer Installation.

 **YouTube**
Scan the QR code
to view the video.



There is also a YouTube Video you can follow for the installation process. See QR Code.



Step 1:

On the Target Board, use a screw driver and then a solid bar and hammer to punch out the rectangular knock-out tab.



Step 2:

Use a 3.5mm drill and drill out the 4 holes where the pilot holes are on the Target Board.




Step 3:

Using a larger drill, clean up the burs from the rear of the Target Board.



Step 4:

Using a stepping drill (available from Bunnings) drill out a 20mm hole where shown.

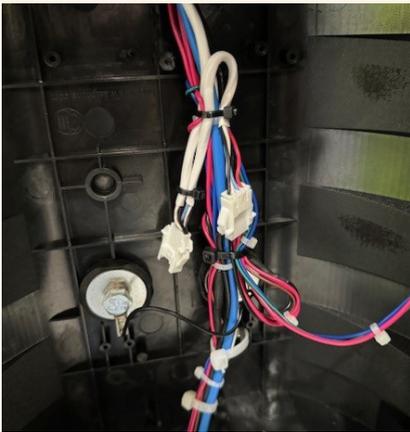

Step 5:

Feed the cable through the Amber light section from the bottom Green light towards the top Red light section.



Step 6:

NOTE: If the unit has a Vehicle Detector fitted, unplug this first.

Then plug the cable into this connector and connect the Vehicle detector into the new wire harness.

Tidy up the cabling using the cable ties provided.



Step 7:

Add the grommet to the cable at the RED light entrance point



Step 8:

Route the cable through the target board and then into the Red Timer Display.



Step 9:

Using the supplied X-head screws or thumb screws (depending on Target Board type fitted), mount the Red Timer Display.



Step 10:

Once the timer is fitted and the lights closed, switch on the controller to test the display.

Use QUICK Start TEST MODE. The Timer will count down when the RED light is on.